


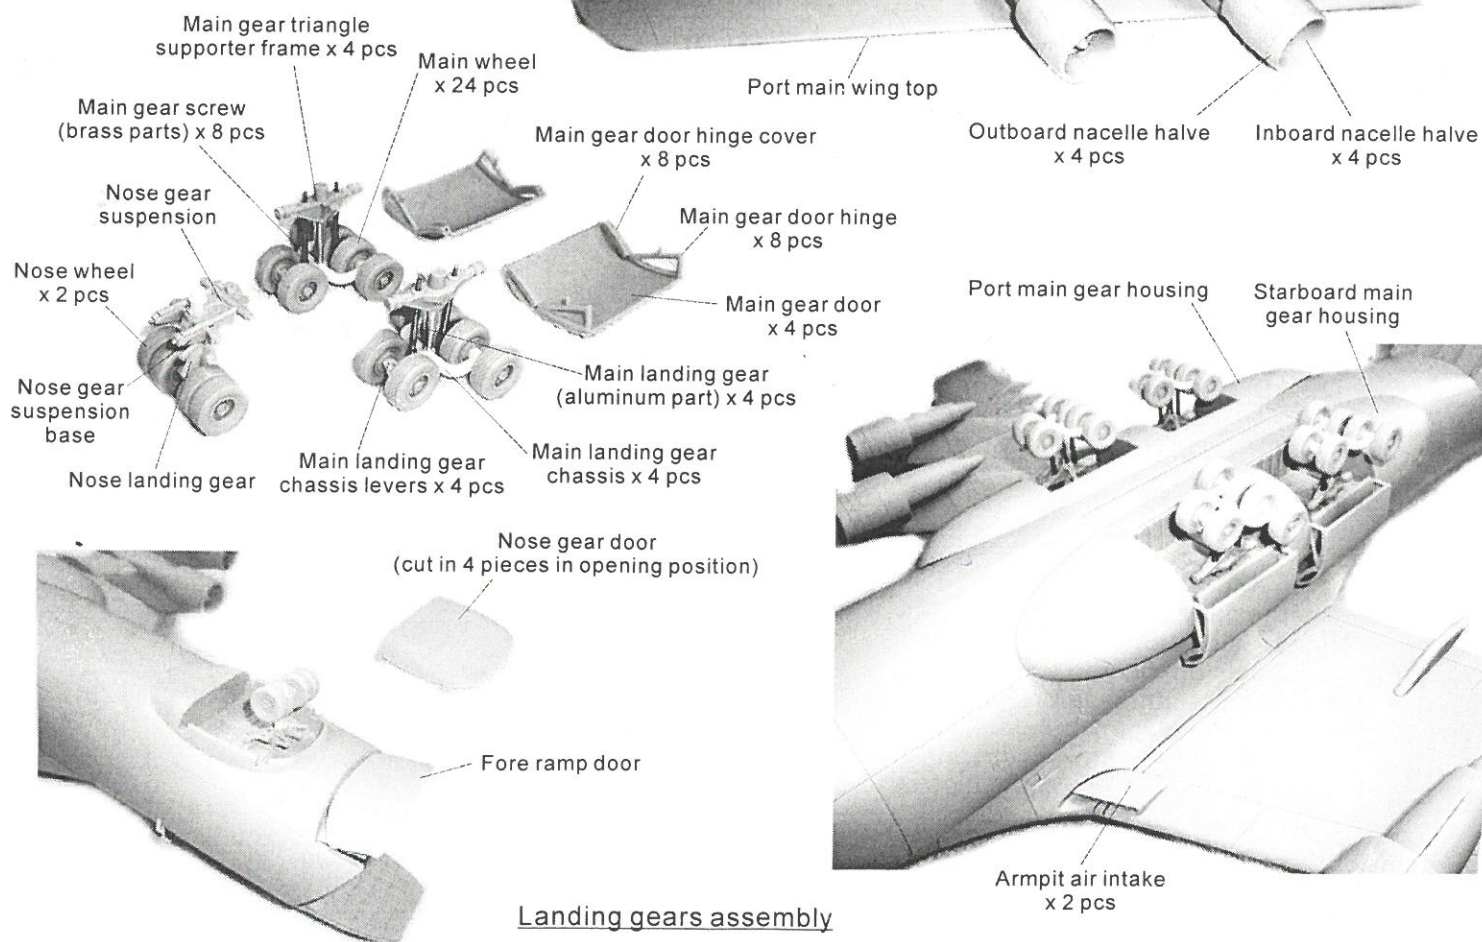
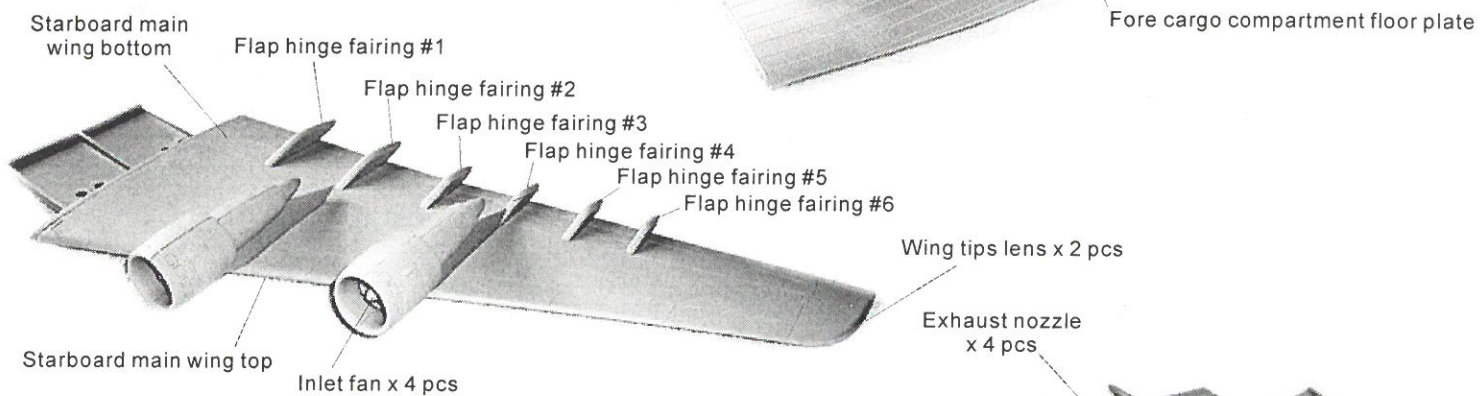
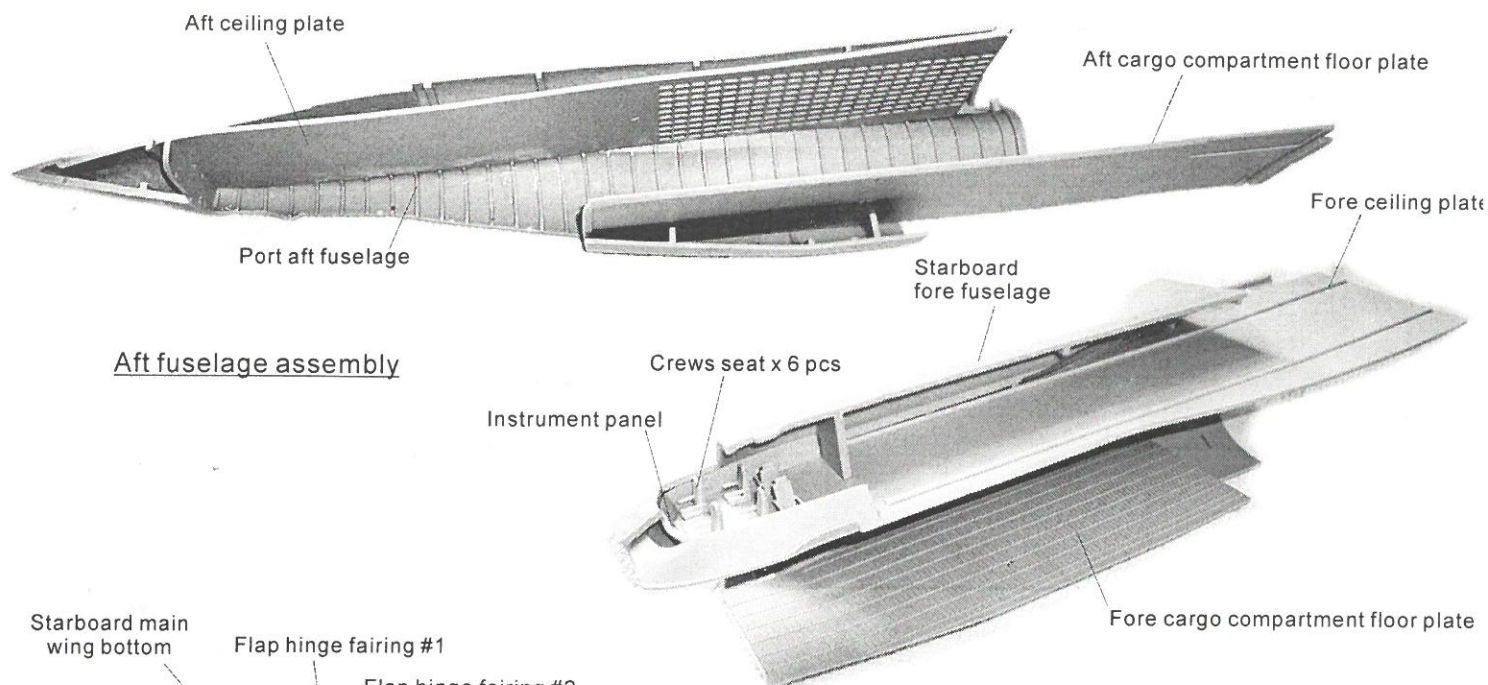
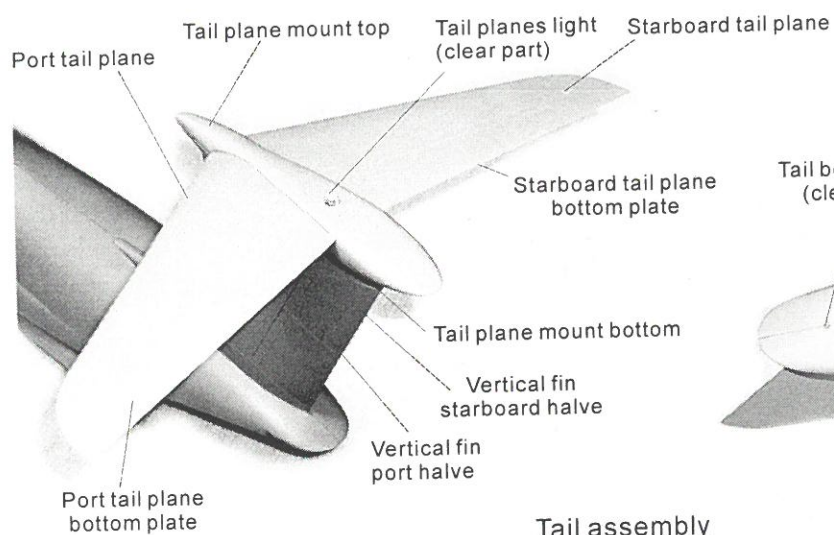


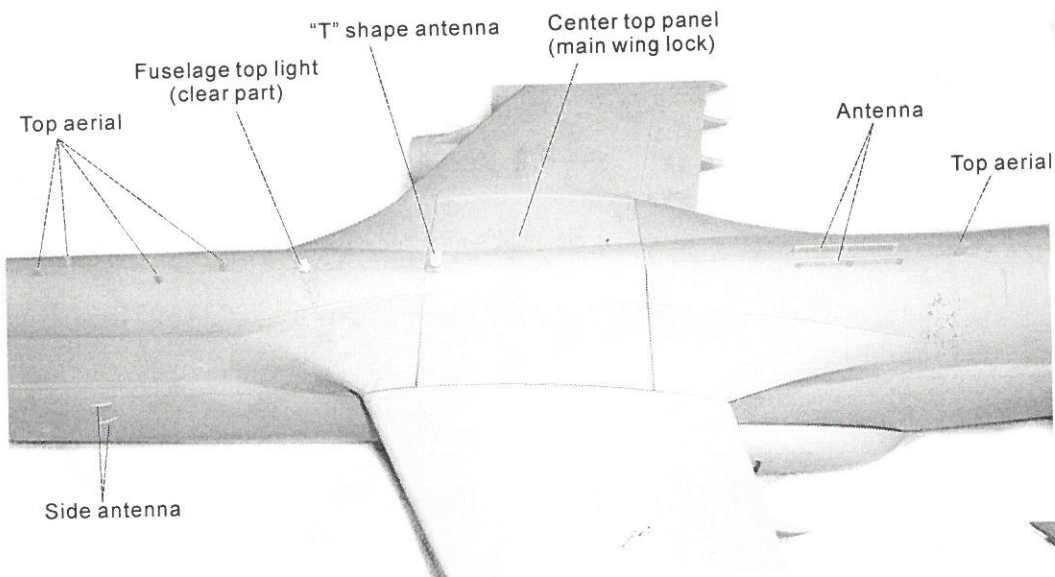


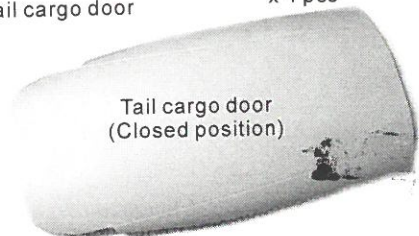

Tail assembly

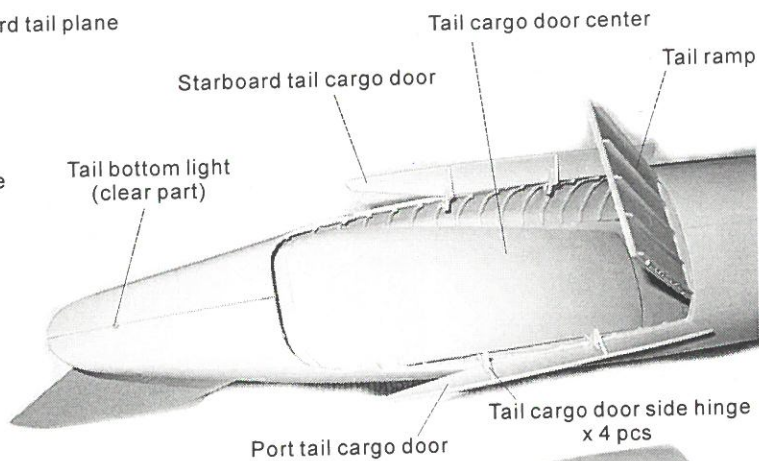

Fuselage top assembly

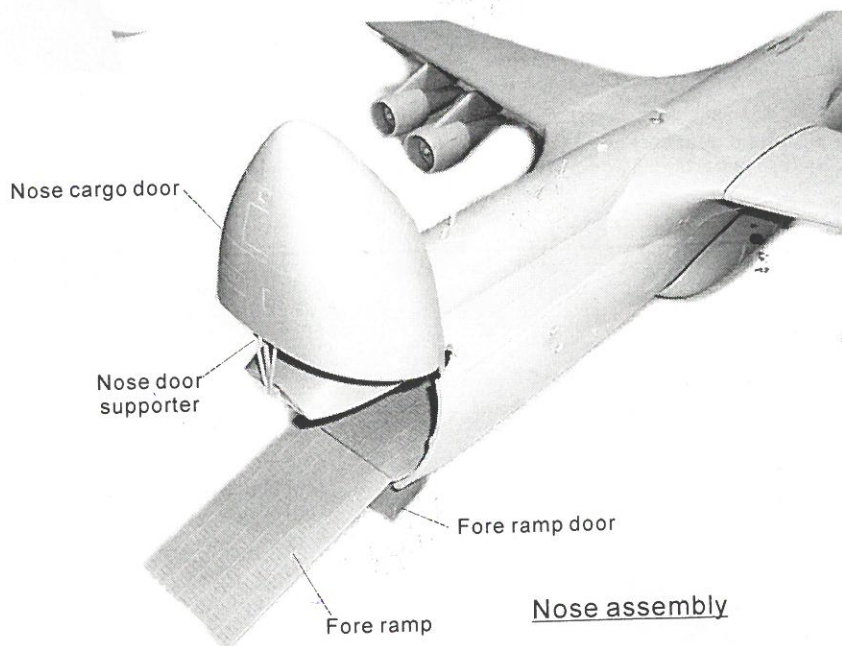

Nose assembly

Attention:

1. Wash all of the parts in warm soapy water.
2. Remove any mold seams and mold pour stubs that remain on the part.
3. Always check parts fitting before glue.
4. For perfect fitting between the parts, may need secondary drilling, sawing or filing.
5. Glue resin parts either Cyanoacrylate (CA) SuperGlue or a two-part Epoxy.
6. Apply Automotive Primer on the model. It will show any seams and bubbles.
7. Recommend using enamels to paint model, because they don't scratch as easily as acrylic paints.